


Cartridge

6.5 PRC - 123/125 grain

Version 9.0

NOSLER®

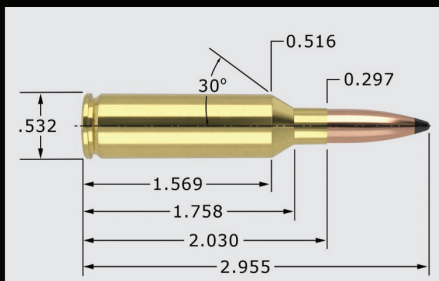

6.5 PRC - 123/125 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.955"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC 123gr. HPBT	2.930"	0.510	0.252
Partition®	PT 125gr. Spitzer	2.940"	0.449	0.256

CASE TYPE:	Hornady	PRIMER TYPE	WLR
CASE HOLDS:	65.9 Gr. WATER	BARREL Length/Make	26" Shilen
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4955	55.0 * MAX. 3183		89%
	53.0 3104		86%
	51.0 3026		82%
IMR 7828	55.5 MAX. 3207		90%
	53.5 3098		86%
	51.5 * 2989		83%
PP 4000-MR	55.0 MAX. 3256		88%
	53.0 3130		85%
	51.0 * 3004		81%
H1000	61.0 MAX. 3274		98%
	59.0 3158		95%
	57.0 * 3043		92%
RL22	57.0 MAX. 3303		94%
	55.0 3208		91%
	53.0 * 3112		87%
MAGPRO	64.0 MAX. 3314		100%
	62.0 3197		97%
	60.0 * 3080		94%
IMR 4831	55.5 * MAX. 3318		90%
	Most Accurate 53.5 3211		87%
	Powder Tested 51.5 3103		84%
Norma MRP	59.5 MAX. 3353		99%
	57.5 * 3250		96%
	55.5 3147		93%
Magnum	65.0 MAX. 3370		100%
	63.0 * 3271		97%
	61.0 3172		94%
RL26	60.0 MAX. 3406		93%
	58.0 * 3300		90%
	56.0 3195		87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load