


# Cartridge

6.5 PRC - 129/130 grain

Version 9.0

# NOSLER®

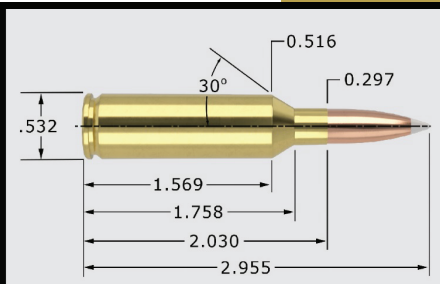

6.5 PRC - 129/130 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.955"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b> 129gr. Spitzer	2.955"	0.530	0.264
AccuBond®	<b>AB</b> 130gr. Spitzer	2.955"	0.488	0.266
Reduced Drag Factor™	<b>RDF</b> 130gr. HPBT	2.955"	0.615	0.266

CASE TYPE:	Hornady	PRIMER TYPE	WLR
CASE HOLDS:	63.7 Gr. WATER	BARREL Length/Make	26" Shilen
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4955</b>	53.5 MAX. 3103		89%
	51.5 * 3015		86%
	49.5 2927		83%
<b>IMR 7828 SSC</b>	55.0 MAX. 3135		89%
	53.0 * 3038		86%
	51.0 2941		83%
<b>RL22</b>	56.0 MAX. 3173		96%
	54.0 * 3063		92%
	52.0 2954		89%
<b>IMR 4831</b>	54.0 MAX. 3183		91%
	52.0 * 3081		87%
	50.0 2979		84%
<b>MAGPRO</b>	62.0 MAX. 3190		100%
	60.0 * 3082		97%
	58.0 2974		94%
<b>PP 4000-MR</b>	55.0 MAX. 3194		91%
	53.0 3073		88%
	51.0 * 2952		84%
<b>H1000</b>	60.0 * MAX. 3212		100%
	58.0 3156		96%
	56.0 3100		93%
<b>RL26</b>	58.0 MAX. 3217		93%
	Most Accurate Powder Tested 56.0 * 3105		90%
	54.0 2992		87%
<b>Norma MRP</b>	59.0 MAX. 3305		** 102%
	57.0 * 3193		98%
	55.0 3082		95%
<b>Magnum</b>	65.0 MAX. 3319		** 104%
	63.0 * 3218		100%
	61.0 3118		97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load