


Cartridge

6.5 PRC 140/142 grain

Version 9.0

NOSLER®

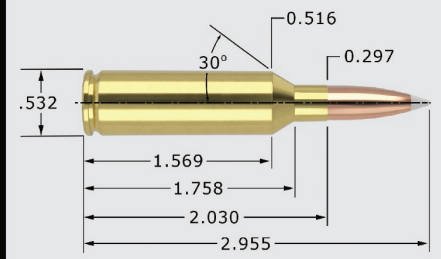

6.5 PRC 140/142 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.955"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 140gr. Spitzer	2.955"	0.509	0.287
Ballistic Tip®	BT 140gr. Spitzer	2.955"	0.509	0.287
Custom Competition®	CC 140gr. HPBT	2.955"	0.529	0.287
Reduced Drag Factor™	RDF 140gr. HPBT	2.955"	0.658	0.287
Partition®	PT 140gr. Spitzer	2.955"	0.490	0.287
AccuBond® Long Range	ABLR 142gr. Spitzer	2.955"	0.625	0.291

CASE TYPE:	Hornady	PRIMER TYPE	WLR
CASE HOLDS:	62.3 Gr. WATER	BARREL Length/Make	26" Shilen
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 8133	55.5 MAX. 2806		98%
	53.5 * 2693		95%
	51.5 2579		91%
IMR 7828	52.5 * MAX. 2952		90%
	50.5 2858		86%
	48.5 2765		83%
IMR 7977	59.0 MAX. 3001		** 102%
	57.0 2897		98%
	55.0 * 2793		95%
IMR 4831	52.0 MAX. 3028		89%
	50.0 2929		86%
	48.0 * 2831		82%
H1000	58.0 MAX. 3031		99%
	56.0 2939		95%
	54.0 * 2847		92%
RL22	54.0 MAX. 3033		94%
	52.0 2930		91%
	50.0 * 2828		87%
PP 4000-MR	53.0 * MAX. 3034		90%
	51.0 2912		86%
	49.0 2791		83%
MAGPRO	61.0 MAX. 3062		101%
	59.0 * 2963		98%
	57.0 2864		94%
RL26	56.0 MAX. 3065		92%
	54.0 * 2966		88%
	52.0 2867		85%
Norma MRP	56.0 MAX. 3113		99%
Most Accurate	54.0 3006		95%
Powder Tested	52.0 * 2899		92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load