


Cartridge

6.5 PRC 150 grain

Version 9.0

NOSLER®

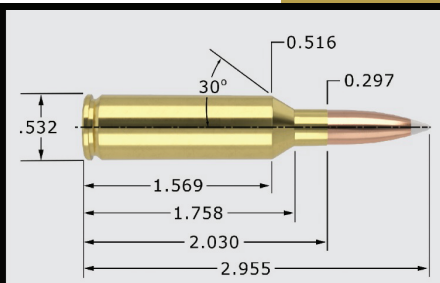

6.5 PRC 150 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.955"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR 150gr. Spitzer	2.955"	0.634	0.307

CASE TYPE:	Hornady	PRIMER TYPE	WLR
CASE HOLDS:	62.7 Gr. WATER	BARREL Length/Make	26" Shilen
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 7977	58.0 MAX.	2945	99%
	56.0	2845	96%
	54.0 *	2744	93%
RL22	53.0 MAX.	2959	92%
	51.0 *	2869	88%
	49.0	2778	85%
IMR 7828	53.0 MAX.	2964	90%
	51.0	2862	87%
	49.0 *	2761	83%
H1000	57.0 MAX.	3030	96%
	55.0	2912	93%
	53.0 *	2795	89%
Norma MRP	55.0 MAX.	3037	96%
	53.0	2940	93%
	51.0 *	2844	89%
IMR 8133	60.0 MAX.	3050	** 106%
	58.0 *	2963	** 102%
	56.0	2877	99%
RL26	56.0 MAX.	3056	91%
	54.0 *	2947	88%
	52.0	2837	85%
MAGPRO	61.0 MAX.	3065	100%
	59.0 *	2972	97%
	57.0	2879	94%
Magnum	61.0 * MAX.	3077	99%
Most Accurate	59.0	2981	96%
Powder Tested	57.0	2884	92%
Norma 217	60.0 MAX.	3077	** 108%
	58.0 *	2982	** 104%
	56.0	2886	100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load