


# Cartridge

## 6.5mm Rem Mag - 100 grain

Version 9.0

# NOSLER®

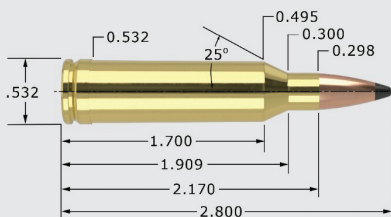

## 6.5mm Rem Mag - 100 grain

## 6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	<b>BT</b> 100gr. Spitzer	2.800"	0.350	0.205
Custom Competition®	<b>CC</b> 100gr. HPBT	2.800"	0.362	0.205
Partition®	<b>PT</b> 100gr. Spitzer	2.800"	0.326	0.205

CASE TYPE:	Remington	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	64.7 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
-------------	------------------	--------------------	-----------------------

<b>H4831SC</b> Most Accurate Powder Tested	65.0	MAX. 3497		**	105%
	63.0	3395		**	101%
	61.0 *	3292			98%
<b>Big Game</b>	58.0	MAX. 3543			91%
	56.0	3431			88%
	54.0 *	3319			85%
<b>RL19</b>	65.0	MAX. 3561		**	109%
	63.0 *	3438		**	106%
	61.0	3315		**	102%
<b>H414</b>	59.0	MAX. 3561			95%
	57.0 *	3445			92%
	55.0	3329			89%
<b>Hunter</b>	61.0	MAX. 3564			97%
	59.0 *	3439			94%
	57.0	3314			91%
<b>N550</b>	58.0	MAX. 3566			100%
	56.0 *	3429			96%
	54.0	3293			93%
<b>W760</b>	59.5	MAX. 3568			96%
	57.5 *	3442			93%
	55.5	3317			90%
<b>IMR 4831</b>	63.0	MAX. 3577		**	104%
	61.0 *	3456		**	101%
	59.0	3335			98%
<b>H4350</b>	60.5	MAX. 3586			99%
	58.5 *	3478			96%
	56.5	3370			92%
<b>IMR 4350</b>	61.5	MAX. 3600		**	102%
	59.5 *	3484			98%
	57.5	3368			95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load