


Cartridge

6.5mm Rem Mag - 120 grain

Version 9.0

NOSLER[®]

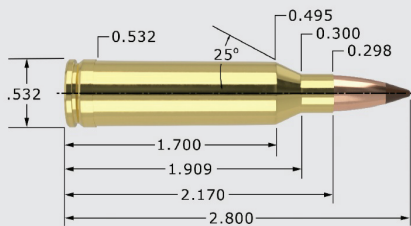

6.5mm Rem Mag - 120 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.800"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip [®]	BT	120gr. Spitzer	2.800"	0.458	0.246
Expansion Tip [®]	ET	120gr. Spitzer	2.800"	0.497	0.246
Due to internal construction differences, always begin with starting loads when using Expansion Tip [®] products.					
CASE TYPE:	Remington	PRIMER TYPE	Rem 9 1/2M		
CASE HOLDS:	61.0 Gr. WATER	BARREL Length/Make	24" Pac-Nor		
		BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H4831SC	61.5 MAX. 3261		**	105%	
	59.5 * 3181		**	102%	
	57.5 3101			98%	
W760	56.0 * MAX. 3268			96%	
	54.0 3164			93%	
	52.0 3059			89%	
Hunter	58.0 * MAX. 3272			98%	
	56.0 3194			95%	
	54.0 3116			91%	
IMR 4350 Most Accurate Powder Tested	57.0 MAX. 3281			100%	
	55.0 3186			96%	
	53.0 * 3092			93%	
IMR 4831	59.0 MAX. 3296		**	103%	
	57.0 * 3193			100%	
	55.0 3091			96%	
H4350	57.0 MAX. 3296			99%	
	55.0 3208			95%	
	53.0 * 3120			92%	
N550	55.5 * MAX. 3298		**	101%	
	53.5 3187			97%	
	51.5 3075			94%	
RL19	60.5 MAX. 3318		**	108%	
	58.5 * 3222		**	104%	
	56.5 3126		**	101%	
RL22	62.5 MAX. 3325		**	111%	
	60.5 * 3214		**	108%	
	58.5 3102		**	104%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load