


Cartridge

6.5mm Rem Mag - 123/125 grain

Version 9.0

NOSLER®

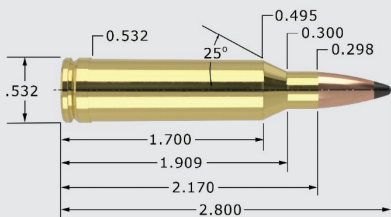

6.5mm Rem Mag - 123/125 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.800"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	123gr. HPBT	2.800"	0.510	0.252
Partition®	PT	125gr. Spitzer	2.800"	0.449	0.256
CASE TYPE:	Remington	PRIMER TYPE	Rem 9 1/2M		
CASE HOLDS:	62.8 Gr. WATER	BARREL Length/Make	24" Pac-Nor		
		BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
W760	54.5 MAX.	3159	91%		
	52.5	3056	88%		
	50.5 *	2953	84%		
H4831SC	58.5 MAX.	3168	97%		
	Most Accurate	3077	94%		
	Powder Tested	54.5 * 2986	90%		
Hunter	56.5 MAX.	3175	93%		
	54.5	3067	89%		
	52.5 *	2960	86%		
IMR 4350	55.0 MAX.	3178	94%		
	53.0	3078	90%		
	51.0 *	2978	87%		
IMR 4831	57.0 MAX.	3218	97%		
	55.0	3119	94%		
	53.0 *	3021	90%		
MAGPRO	65.5 MAX.	3219	**	108%	
	63.5 *	3141	**	104%	
	61.5	3062	**	101%	
RL19	59.0 MAX.	3263	**	102%	
	57.0 *	3170	99%		
	55.0	3078	95%		
RL22	61.0 MAX.	3271	**	106%	
	59.0 *	3175	**	102%	
	57.0	3080	99%		
IMR 7828	61.5 MAX.	3271	**	104%	
	59.5	3178	**	101%	
	57.5 *	3085	97%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load