


Cartridge

6.5mm Rem Mag - 129/130 grain

Version 9.0

NOSLER®

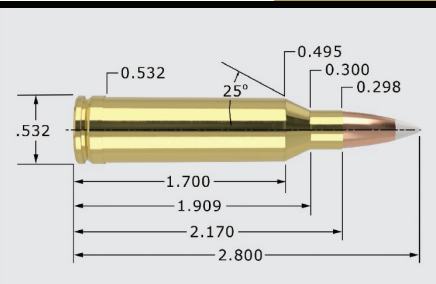

6.5mm Rem Mag - 129/130 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR 129gr. Spitzer	2.800"	0.530	0.264
AccuBond®	AB 130gr. Spitzer	2.800"	0.488	0.266
Reduced Drag Factor™	RDF 130gr. HPBT	2.800"	0.615	0.266

CASE TYPE:	Remington	PRIMER TYPE	Rem 9 1/2M	
CASE HOLDS:	60.1 Gr. WATER	BARREL Length/Make	24" Pac-Nor	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
W760	52.5 MAX. 3006		91%
	50.5 * 2927		88%
	48.5 2848		85%
MAGPRO	63.5 * MAX. 3085		** 109%
	61.5 3007		** 105%
	59.5 2930		** 102%
Hunter	56.5 MAX. 3097		97%
	54.5 3036		93%
	52.5 * 2974		90%
H4831SC	54.0 MAX. 3109		94%
	52.0 3032		90%
	50.0 * 2956		87%
IMR 4831 Most Accurate Powder Tested	56.0 MAX. 3140		100%
	54.0 3049		96%
	52.0 * 2957		93%
RL19	57.5 MAX. 3142		** 104%
	55.5 3039		100%
	53.5 * 2936		97%
RL22	59.5 MAX. 3174		** 108%
	57.5 3088		** 104%
	55.5 * 3003		100%
IMR 7828	60.5 MAX. 3180		** 107%
	58.5 * 3097		** 104%
	56.5 3015		100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load