


Cartridge

6.5mm Rem Mag - 140/142 grain

Version 9.0

NOSLER®

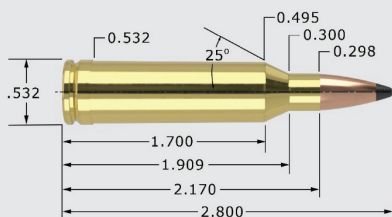

6.5mm Rem Mag - 140/142 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 140gr. Spitzer	2.800"	0.509	0.287
Ballistic Tip®	BT 140gr. Spitzer	2.800"	0.509	0.287
Custom Competition®	CC 140gr. HPBT	2.800"	0.529	0.287
Partition®	PT 140gr. Spitzer	2.800"	0.490	0.287
Reduced Drag Factor™	RDF 140gr. HPBT	2.800"	0.658	0.287
AccuBond® Long Range	ABLR 142gr. Spitzer	2.800"	0.625	0.291

*1-8" twist recommended for the 142gr AccuBond® Long Range

CASE TYPE:	Remington	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	59.3 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
W760	50.5 MAX. 2899		89%
	48.5 * 2812		86%
	46.5 2724		82%
MAGPRO	60.5 MAX. 2952		** 105%
	58.5 2859		** 102%
	56.5 * 2766		98%
IMR 4350	53.0 MAX. 2964		96%
	51.0 * 2868		92%
	49.0 2771		88%
Hunter	55.0 MAX. 2967		96%
	53.0 2888		92%
	51.0 * 2810		89%
H4831SC	57.0 MAX. 2979		100%
	55.0 2907		97%
	53.0 * 2835		93%
IMR 4831	55.0 MAX. 2995		99%
	53.0 * 2913		96%
	51.0 2831		92%
RL19 Most Accurate Powder Tested	55.5 MAX. 3000		** 102%
	53.5 2902		98%
	51.5 * 2804		94%
RL22	57.5 MAX. 3041		** 105%
	55.5 * 2958		** 102%
	53.5 2876		98%
IMR 7828	58.5 MAX. 3064		** 105%
	56.5 * 2973		** 101%
	54.5 2882		98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load