


Cartridge

6.5x55 - 120 grain

Version 9.0

NOSLER®

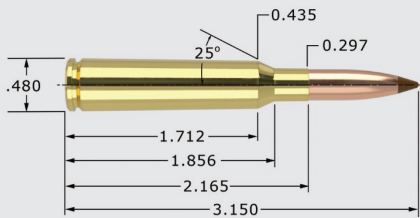

6.5x55 - 120 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	3.150"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	120gr. Spitzer	3.025"	0.458 0.246
Expansion Tip®	ET	120gr. Spitzer	2.975"	0.497 0.246

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	54.0 Gr. WATER	BARREL Length/Make	23" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2520	38.0 MAX.	2770	73%
	36.0	2670	69%
	34.0 *	2570	65%
N150	38.0 MAX.	2791	83%
	36.0	2689	78%
	34.0 *	2587	74%
Varget	41.0 MAX.	2834	82%
	39.0 *	2726	78%
	37.0	2618	74%
N160	46.5 MAX.	2837	96%
	44.5	2708	92%
	42.5 *	2579	87%
Hunter	47.0 MAX.	2857	90%
	45.0	2762	86%
	43.0 *	2667	82%
W760	45.5 * MAX.	2881	88%
	Most Accurate	2755	84%
	Powder Tested	2630	80%
IMR 4350	45.5 * MAX.	2902	90%
	43.5	2737	86%
	41.5	2572	82%
H4350	47.0 MAX.	3000	92%
	45.0	2870	88%
	43.0 *	2740	84%
RL19	48.5 MAX.	3002	98%
	46.5	2867	94%
	44.5 *	2732	90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load