


Cartridge

6.5x55 - 123/125 grain

Version 9.0

NOSLER®

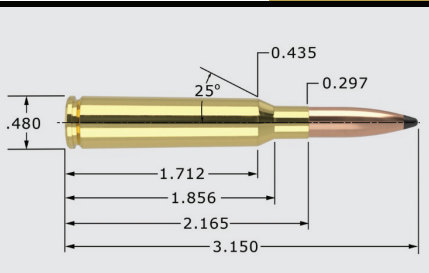

6.5x55 - 123/125 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.150"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	123gr. HPBT	3.025"	0.510	0.252
Partition®	PT	125gr. Spitzer	3.025"	0.449	0.256
CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2		
CASE HOLDS:	53.4 Gr. WATER	BARREL Length/Make	23" Lilja		
		BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H4895	37.0 MAX.	2730	76%		
	35.0	2620	72%		
	33.0 *	2510	68%		
Hunter	46.0 MAX.	2797	89%		
	44.0	2663	85%		
	42.0 *	2530	81%		
N560	48.5 MAX.	2813	**	101%	
	46.5	2702	97%		
	44.5 *	2592	93%		
W760	45.0 MAX.	2818	88%		
	43.0 *	2726	84%		
	41.0	2635	80%		
Varget	40.0 * MAX.	2869	81%		
	38.0	2792	77%		
	36.0	2716	73%		
IMR 4350 Most Accurate Powder Tested	45.5 MAX.	2910	91%		
	43.5	2750	87%		
	41.5 *	2590	83%		
IMR 4831	47.0 * MAX.	2940	94%		
	45.0	2810	90%		
	43.0	2680	86%		
RL19	47.5 MAX.	2950	97%		
	45.5	2850	93%		
	43.5 *	2750	89%		
H4350	45.5 MAX.	2963	90%		
	43.5	2856	86%		
	41.5 *	2750	82%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load