


Cartridge

6.5x55 - 129/130 grain

Version 9.0

NOSLER®

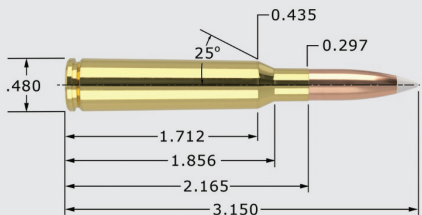

6.5x55 - 129/130 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.150"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	129gr. Spitzer	3.025"	0.530	0.264
AccuBond®	AB	130gr. Spitzer	3.025"	0.488	0.266
Reduced Drag Factor™	RDF	130gr. HPBT	3.025"	0.615	0.266
CASE TYPE:	Nosler		PRIMER TYPE	Rem 9 1/2	
CASE HOLDS:	52.0	Gr. WATER	BARREL Length/Make	23" Lilja	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4350	43.5 MAX.	2627	89%		
	41.5	2516	85%		
	39.5 *	2406	81%		
Magnum	52.0 * MAX.	2643	** 102%		
	50.0	2512	98%		
	48.0	2381	94%		
H4831SC	48.0 * MAX.	2692	96%		
	46.0	2594	92%		
	44.0	2497	88%		
H4350	43.5 MAX.	2716	89%		
	41.5 *	2617	84%		
	39.5	2519	80%		
N550	43.0 MAX.	2741	92%		
	41.0 *	2624	88%		
	39.0	2507	83%		
W760	44.0 * MAX.	2755	89%		
	42.0	2651	85%		
	40.0	2548	81%		
RL19 Most Accurate Powder Tested	47.5 MAX.	2776	99%		
	45.5 *	2641	95%		
	43.5	2507	91%		
N560	48.0 MAX.	2794	** 103%		
	46.0	2662	98%		
	44.0 *	2530	94%		
RL17	43.0 * MAX.	2822	86%		
	41.0	2713	82%		
	39.0	2604	78%		
Hunter	45.0 MAX.	2837	89%		
	43.0 *	2722	85%		
	41.0	2607	81%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load