


Cartridge

6.5x55 - 140/142 grain

Version 9.0

NOSLER®

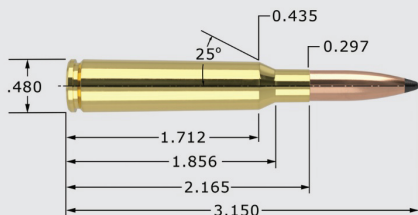

6.5x55 - 140/142 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.150"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	140gr. Spitzer	3.025"	0.509	0.287
Ballistic Tip®	BT	140gr. Spitzer	3.025"	0.509	0.287
Custom Competition®	CC	140gr. HPBT	3.025"	0.529	0.287
Partition®	PT	140gr. Spitzer	3.025"	0.490	0.287
Reduced Drag Factor™	RDF	140gr. HPBT	3.025"	0.658	0.287
AccuBond® Long Range	ABLR	142gr. Spitzer	3.025"	0.625	0.291

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	50.2 Gr. WATER	BARREL Length/Make	23" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N150	36.5 MAX. 2494	[Bar]	86%
	34.5 * 2383	[Bar]	81%
	32.5 2273	[Bar]	76%
N160	41.0 MAX. 2509	[Bar]	91%
	39.0 2413	[Bar]	86%
	37.0 * 2316	[Bar]	82%
Magnum	51.5 MAX. 2591	[Bar]	** 104%
	49.5 * 2482	[Bar]	100%
	47.5 2373	[Bar]	96%
N560	46.0 MAX. 2689	[Bar]	** 102%
	44.0 2584	[Bar]	97%
	42.0 * 2478	[Bar]	93%
RL22	46.5 * MAX. 2740	[Bar]	** 101%
	Most Accurate 44.5 2650	[Bar]	96%
	Powder Tested 42.5 2560	[Bar]	92%
IMR 4831	44.5 MAX. 2762	[Bar]	95%
	42.5 2657	[Bar]	91%
	40.5 * 2552	[Bar]	86%
H4831	47.0 MAX. 2778	[Bar]	98%
	45.0 2663	[Bar]	93%
	43.0 * 2548	[Bar]	89%
IMR 4350	43.0 MAX. 2780	[Bar]	92%
	41.0 2640	[Bar]	87%
	39.0 * 2500	[Bar]	83%
H1000	52.0 MAX. 2790	[Bar]	** 110%
	50.0 2690	[Bar]	** 105%
	48.0 * 2590	[Bar]	** 101%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load