


Cartridge

6.8mm Rem SPC - 100 grain

Version 9.0

NOSLER®

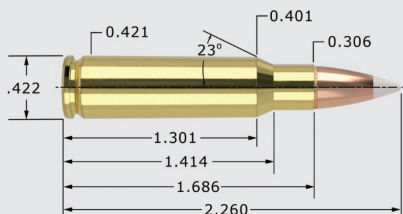

6.8mm Rem SPC - 100 grain

6.8mm (.277")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	100 gr. Spitzer	2.245"	0.323	0.186
CASE TYPE:	Remington	PRIMER TYPE	Rem 9 1/2		
CASE HOLDS:	28.6 Gr. WATER	BARREL Length/Make	20" Pac-Nor		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4198	24.0 MAX.	2663	97%		
	23.0	2556	93%		
	22.0 *	2449	89%		
H335	30.5 MAX.	2687	** 108%		
	29.5 *	2612	** 105%		
	28.5	2537	** 101%		
RL7	26.5 MAX.	2696	** 101%		
	25.5	2592	97%		
	24.5 *	2488	93%		
X-Terminator	31.0 MAX.	2710	** 111%		
	30.0	2650	** 108%		
	29.0 *	2591	** 104%		
RL10x	28.0 MAX.	2742	** 110%		
	27.0	2659	** 106%		
	26.0 *	2576	** 102%		
IMR 3031	29.0 MAX.	2756	** 113%		
	28.0	2663	** 109%		
	27.0 *	2569	** 105%		
Benchmark	31.0 MAX.	2766	** 117%		
Most Accurate	30.0	2671	** 113%		
Powder Tested	29.0 *	2575	** 110%		
H322	29.5 MAX.	2771	** 112%		
	28.5	2684	** 108%		
	27.5 *	2597	** 104%		
LT-30	28.0 * MAX.	2793	** 114%		
	27.0	2734	** 110%		
	26.0	2674	** 106%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load