


Cartridge

6.8mm Rem SPC - 110 grain

Version 9.0

NOSLER®

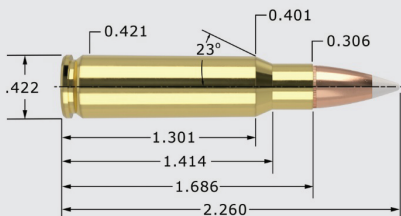

6.8mm Rem SPC - 110 grain

6.8mm (.277")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®		AB 110gr. Spitzer	2.245"	0.370	0.205
CASE TYPE:	Remington	PRIMER TYPE		Rem 9 1/2	
CASE HOLDS:	27.5 Gr. WATER	BARREL Length/Make		20" Pac-Nor	
		BARREL Twist		1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4198	23.0 * MAX.	2484	97%		
		2418	93%		
		2352	89%		
X-Terminator	29.5 MAX.	2523	** 110%		
Most Accurate	28.5 *	2471	** 106%		
Powder Tested	27.5	2419	** 103%		
H322	28.0 MAX.	2529	** 110%		
	27.0 *	2454	** 106%		
	26.0	2379	** 102%		
H335	29.0 MAX.	2532	** 107%		
	28.0 *	2440	** 103%		
	27.0	2349	100%		
Benchmark	29.0 MAX.	2540	** 114%		
	28.0 *	2449	** 110%		
	27.0	2358	** 106%		
AA 2230	29.0 MAX.	2542	** 108%		
	28.0	2482	** 104%		
	27.0 *	2422	100%		
RL10x	26.5 MAX.	2544	** 108%		
	25.5	2454	** 104%		
	24.5 *	2365	100%		
IMR 3031	27.5 MAX.	2544	** 111%		
	26.5	2466	** 107%		
	25.5 *	2388	** 103%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load