


# Cartridge

## 6.8mm Rem SPC - 115 grain

Version 9.0

# NOSLER®

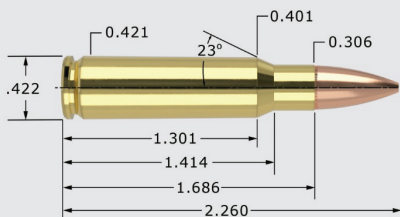

## 6.8mm Rem SPC - 115 grain

## 6.8mm (.277")

MAXIMUM SAAMI O.A.C.L.	2.260"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	<b>CC</b> 115gr. HPBT	2.230"	0.375	0.214

CASE TYPE:	Remington	PRIMER TYPE	Rem 9 1/2	
CASE HOLDS:	29.5 Gr. WATER	BARREL Length/Make	20" Pac-Nor	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL10x</b>	25.0 MAX.	2384	95%
	24.0 *	2291	91%
	23.0	2198	88%
<b>IMR 4198</b>	22.5 MAX.	2391	88%
	21.5 *	2305	85%
	20.5	2218	81%
<b>H335</b>	28.5 MAX.	2446	98%
	27.5	2342	95%
	26.5 *	2238	91%
<b>IMR 3031</b>	27.0 MAX.	2459	** 102%
	26.0 *	2348	98%
	25.0	2236	94%
<b>Benchmark</b>	29.0 MAX.	2522	** 106%
	28.0 *	2424	** 103%
	27.0	2326	99%
<b>LT-30</b>	26.0 MAX.	2535	** 102%
	25.0 *	2448	99%
	24.0	2361	95%
<b>X-Terminator</b>	29.0 * MAX.	2555	** 101%
	28.0	2483	97%
	27.0	2411	94%
<b>H322</b>	27.5 MAX.	2560	** 101%
	26.5	2483	97%
	25.5 *	2405	93%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load