


Cartridge

6mm BR - Rem - 55 grain

Version 9.0

NOSLER®

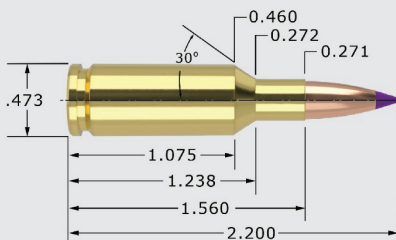

6mm BR - Rem - 55 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	2.200"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	RTL 55gr. Spitzer	2.150"	0.288	0.133
Due to the longer bearing surface of Ballistic Tip Lead-Free bullets, always begin with starting loads.				
Ballistic Tip® Varmint	BTV 55gr. Spitzer	2.150"	0.276	0.133
Nosler®	CRD 55gr. FBSP	2.150"	0.203	0.133
Varmageddon®	VMG 55gr. FB Tipped	2.150"	0.252	0.133

CASE TYPE:	Remington	PRIMER TYPE	CCI 450
CASE HOLDS:	35.8 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N120	28.5 MAX. 3626		97%
	26.5 3392		90%
	24.5 * 3158		83%
IMR 4227	27.0 * MAX. 3630		90%
	25.0 3401		83%
	23.0 3171		77%
AA 2015	32.0 * MAX. 3647		** 102%
	30.0 3411		95%
	28.0 3176		89%
W748	36.0 MAX. 3667		** 105%
	34.0 3415		99%
	32.0 * 3163		93%
H4895	35.0 * MAX. 3674		** 107%
	33.0 3437		** 101%
	31.0 3200		95%
H322	32.5 * MAX. 3682		98%
	30.5 3439		92%
	28.5 3196		86%
AA 1680	29.5 * MAX. 3700		87%
	27.5 3433		81%
	25.5 3167		75%
IMR 4198	29.5 * MAX. 3708		96%
	27.5 3425		89%
	25.5 3141		83%
RL7	31.0 MAX. 3720		94%
	Most Accurate 29.0 3416		88%
	Powder Tested 27.0 * 3112		82%
AA 2230	35.0 * MAX. 3810		100%
	33.0 3543		94%
	31.0 3276		88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load