


Cartridge

6mm CM - 105/107 grain

Version 9.0

NOSLER®

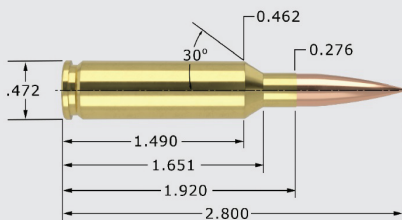

6mm CM - 105/107 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
Reduced Drag Factor™	RDF 105gr. HPBT	2.800"	0.571	0.254
Custom Competition®	CC 107gr. HPBT	2.800"	0.525	0.259

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	48.1 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-7 1/2"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
W760	39.5 MAX. 2927		86%
	37.5 * 2779		82%
	35.5 2631		77%
H1000 Most Accurate Powder Tested	45.0 MAX. 2949		99%
	43.0 * 2800		95%
	41.0 2651		90%
N160	41.5 * MAX. 2954		96%
	39.5 2835		91%
	37.5 2716		87%
RL16	39.0 MAX. 2969		91%
	37.0 * 2852		86%
	35.0 2734		82%
H4350	39.5 * MAX. 2970		87%
	37.5 2860		83%
	35.5 2750		78%
IMR 4451	41.5 MAX. 2983		92%
	39.5 * 2840		87%
	37.5 2698		83%
IMR 7977	45.0 * MAX. 2985		** 101%
	43.0 2813		96%
	41.0 2641		92%
Norma MRP	43.0 MAX. 3018		98%
	41.0 * 2881		94%
	39.0 2744		89%
MAGPRO	46.5 MAX. 3025		100%
	44.5 * 2884		95%
	42.5 2743		91%
RL19	43.0 * MAX. 3043		97%
	41.0 2907		93%
	39.0 2770		88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load