


Cartridge

6mm CM - 115 grain

Version 9.0

NOSLER®

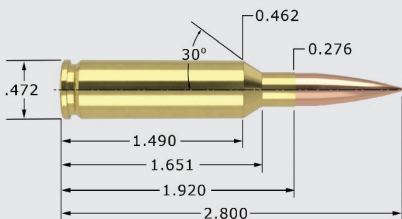

6mm CM - 115 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.800"		TESTED O.A.C.L.	B.C.	S.D.
Reduced Drag Factor™		RDF	115gr. HPBT	2.800"	0.634	0.278
CASE TYPE:	Nosler		PRIMER TYPE	WLR		
CASE HOLDS:	46.8	Gr. WATER	BARREL Length/Make	24" H-S Prec.		
			BARREL Twist	1-7 1/2"		
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4451	40.0	MAX.	2876	91%		
	38.0	*	2733	86%		
	36.0		2589	82%		
H4350	39.5	* MAX.	2877	89%		
	37.5		2754	85%		
	35.5		2631	80%		
Hunter	42.0	MAX.	2885	93%		
	40.0		2760	88%		
	38.0	*	2634	84%		
RL23	41.0	MAX.	2898	97%		
	39.0	*	2778	93%		
	37.0		2658	88%		
MAGPRO	45.5	MAX.	2899	100%		
	43.5		2758	96%		
	41.5	*	2617	91%		
AA 4350	41.5	MAX.	2919	100%		
	39.5	*	2769	95%		
	37.5		2618	90%		
Norma URP	40.5	* MAX.	2930	97%		
	38.5		2805	92%		
	36.5		2681	87%		
IMR 4831	41.0	MAX.	2938	94%		
	39.0	*	2798	89%		
	37.0		2658	85%		
RL17	40.0	MAX.	2958	88%		
	38.0		2823	84%		
	36.0	*	2689	80%		
Magnum	46.5	MAX.	2973	** 101%		
	44.5		2822	97%		
	42.5		2670	92%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load