


# Cartridge

6mm CM - 55 grain

Version 9.0

# NOSLER®

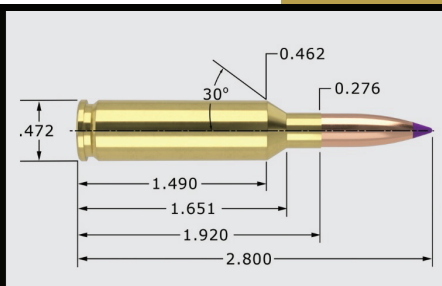

6mm CM - 55 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	<b>BTLF</b> 55gr. Spitzer	2.480"	0.288	0.133
Due to the longer bearing surface of Ballistic Tip Lead-Free bullets, always begin with starting loads.				
Ballistic Tip® Varmint	<b>BTV</b> 55gr. Spitzer	2.480"	0.276	0.133
Nosler®	<b>C&amp;D</b> 55gr. FBSP	2.480"	0.203	0.133
Varmageddon®	<b>VMG</b> 55gr. FB Tipped	2.480"	0.252	0.133

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	49.1 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-7 1/2"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>Varget</b>	43.5 * MAX.	3961	96%
	41.5	3758	91%
	39.5	3555	87%
<b>AA 2520</b>	42.5 * MAX.	3966	89%
	40.5	3804	85%
	38.5	3642	81%
<b>N540</b>	44.5 * MAX.	3979	** 101%
	42.5	3769	96%
	40.5	3559	92%
<b>RL15</b>	44.0 * MAX.	4000	93%
	42.0	3784	89%
	40.0	3568	85%
<b>IMR 8208 XBR</b>	42.5 * MAX.	4022	95%
	40.5	3871	91%
	38.5	3720	86%
<b>H380</b>	48.0 MAX.	4026	** 103%
	46.0 *	3814	99%
	44.0	3602	94%
<b>H4895</b>	42.0 * MAX.	4028	94%
	40.0	3869	90%
	38.0	3710	85%
<b>W748</b>	45.0 * MAX.	4032	95%
	43.0	3862	91%
	41.0	3692	87%
<b>BL-C(2)</b>	46.5 * MAX.	4050	96%
	44.5	3883	92%
	42.5	3716	88%
<b>CFE 223</b>	46.5 MAX.	4077	95%
Most Accurate	44.5 *	3816	91%
Powder Tested	42.5	3555	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load