


# Cartridge

6mm CM - 70 grain

Version 9.0

# NOSLER®

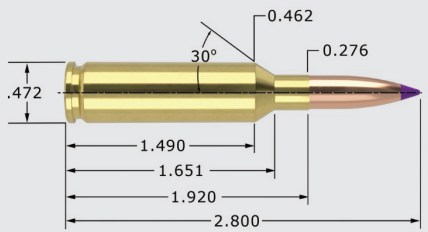

6mm CM - 70 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.800"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	<b>BTV</b>	70gr. Spitzer	2.675"	0.310	0.169
Varmageddon®	<b>VMG</b>	70gr. FB Tipped	2.675"	0.305	0.169
CASE TYPE:	Nosler	PRIMER TYPE	WLR		
CASE HOLDS:	49.6 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-7 1/2"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>H4831</b>	46.0 MAX.	3513	97%		
	44.0 *	3330	92%		
	42.0	3147	88%		
<b>IMR 4451</b>	45.5 * MAX.	3543	98%		
	43.5	3368	93%		
	41.5	3193	89%		
<b>Norma 204</b>	46.0 MAX.	3551	**	103%	
	44.0 *	3374	99%		
	42.0	3197	94%		
<b>H414</b>	43.0 MAX.	3574	90%		
	41.0 *	3442	86%		
	39.0	3310	82%		
<b>H380</b>	43.0 * MAX.	3596	91%		
	41.0	3468	87%		
	39.0	3340	83%		
<b>RL16</b>	44.0 * MAX.	3607	100%		
	42.0	3420	95%		
	40.0	3233	91%		
<b>W760</b>	45.0 * MAX.	3607	95%		
	43.0	3451	91%		
	41.0	3295	87%		
<b>H4350</b> Most Accurate Powder Tested	45.0 * MAX.	3621	96%		
	43.0	3436	92%		
	41.0	3251	87%		
<b>AA 2700</b>	45.5 * MAX.	3627	96%		
	43.5	3548	91%		
	41.5	3469	87%		
<b>N550</b>	44.5 MAX.	3628	100%		
	42.5 *	3409	95%		
	40.5	3190	91%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load