


Cartridge

6mm CM - 80 grain

Version 9.0

NOSLER®

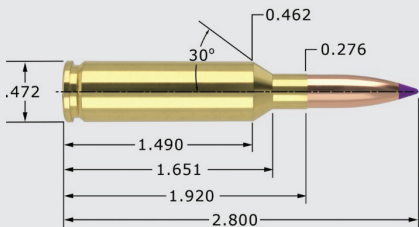

6mm CM - 80 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.800"	TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip® Varmint		BTV	80gr. Spitzer	2.675"	0.329	0.194
CASE TYPE:	Nosler	PRIMER TYPE			WLR	
CASE HOLDS:	49.2	Gr. WATER	BARREL Length/Make		24" H-S Prec.	
			BARREL Twist		1-7 1/2"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)		
MAGPRO	49.0 * MAX.	3260	***		103%	
	47.0	3081			98%	
	45.0	2902			94%	
IMR 4451	44.0	MAX. 3363			95%	
	42.0 *	3181			91%	
	40.0	2999			86%	
AA 2700 Most Accurate Powder Tested	42.5 * MAX.	3363			90%	
	40.5	3201			86%	
	38.5	3039			82%	
H380	41.5	MAX. 3369			89%	
	39.5 *	3273			85%	
	37.5	3177			80%	
W760	43.5 * MAX.	3375			93%	
	41.5	3135			88%	
	39.5	2895			84%	
H4350	42.5 * MAX.	3377			91%	
	40.5	3239			87%	
	38.5	3101			83%	
IMR 4350	44.5	MAX. 3390			97%	
	42.5 *	3235			92%	
	40.5	3080			88%	
N550	43.0 * MAX.	3425			97%	
	41.0	3235			93%	
	39.0	3045			88%	
RL16	43.0 * MAX.	3432			98%	
	41.0	3274			94%	
	39.0	3116			89%	
RL17	43.5	MAX. 3454			92%	
	41.5 *	3361			87%	
	39.5	3268			83%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load