


Cartridge

6mm CM - 85/90 grain

Version 9.0

NOSLER®

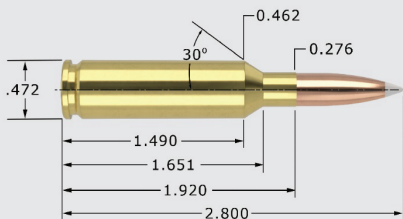

6mm CM - 85/90 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.800"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	PT	85gr. Spitzer	2.660"	0.315	0.206
AccuBond®	AB	90gr. Spitzer	2.675"	0.376	0.218
Ballistic Tip®	BT	90gr. Spitzer	2.675"	0.365	0.218
Expansion Tip®	ET	90gr. Spitzer	2.675"	0.403	0.218
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
CASE TYPE:	Nosler	PRIMER TYPE	WLR		
CASE HOLDS:	48.1 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-7 1/2"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 7828 SSC	43.5 MAX. 3063		93%		
Most Accurate	41.5 * 2922		89%		
Powder Tested	39.5 2782		85%		
N160	42.5 * MAX. 3075		98%		
	40.5 2926		94%		
	38.5 2777		89%		
H1000	47.0 MAX. 3081		**	103%	
	45.0 * 2947		99%		
	43.0 2813		95%		
H4831SC	45.5 * MAX. 3131		99%		
	43.5 2986		94%		
	41.5 2841		90%		
RL16	42.0 * MAX. 3197		98%		
	40.0 3044		93%		
	38.0 2891		89%		
MAGPRO	49.5 MAX. 3198		**	106%	
	47.5 * 3091		**	102%	
	45.5 2984		98%		
Norma MRP	45.5 * MAX. 3210		**	104%	
	43.5 3017		99%		
	41.5 2824		95%		
RL19	46.0 MAX. 3253		**	104%	
	44.0 * 3122		99%		
	42.0 2991		95%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load