


Cartridge

6mm CM - 95/100 grain

Version 9.0

NOSLER®

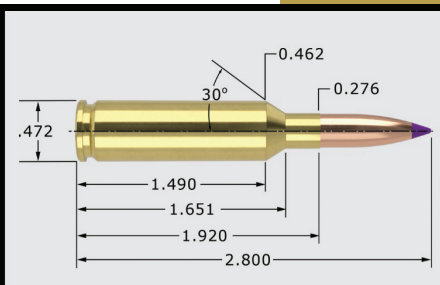

6mm CM - 95/100 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	95gr. Spitzer	2.800"	0.379 0.230
CT® Ballistic Silvertip®	BST	95gr. Spitzer	2.800"	0.379 0.230
Partition®	PT	95gr. Spitzer	2.800"	0.365 0.230
Partition®	PT	100gr. Spitzer	2.660"	0.384 0.242

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	47.7 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-7 1/2"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
W760	40.5 MAX. 3004	[Bar]	89%
	38.5 * 2819	[Bar]	85%
	36.5 2634	[Bar]	80%
AA 2700 Most Accurate Powder Tested	40.5 MAX. 3047	[Bar]	88%
	38.5 * 2931	[Bar]	84%
	36.5 2815	[Bar]	80%
IMR 4451	42.5 * MAX. 3056	[Bar]	95%
	40.5 2935	[Bar]	90%
	38.5 2815	[Bar]	86%
H1000	46.5 MAX. 3058	[Bar]	** 103%
	44.5 * 2946	[Bar]	99%
	42.5 2834	[Bar]	94%
H4831SC	45.5 MAX. 3065	[Bar]	99%
	43.5 * 2961	[Bar]	95%
	41.5 2856	[Bar]	91%
H4350	40.5 MAX. 3066	[Bar]	90%
	38.5 * 2956	[Bar]	85%
	36.5 2847	[Bar]	81%
RL16	40.0 MAX. 3072	[Bar]	94%
	38.0 * 2966	[Bar]	90%
	36.0 2859	[Bar]	85%
MAGPRO	48.5 MAX. 3099	[Bar]	** 105%
	46.5 * 2980	[Bar]	100%
	44.5 2861	[Bar]	96%
Norma MRP	44.5 * MAX. 3117	[Bar]	** 103%
	42.5 2992	[Bar]	98%
	40.5 2866	[Bar]	93%
RL19	44.5 * MAX. 3135	[Bar]	** 101%
	42.5 2998	[Bar]	97%
	40.5 2861	[Bar]	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load