


Cartridge

6mm PPC - 55 grain

Version 9.0

NOSLER®

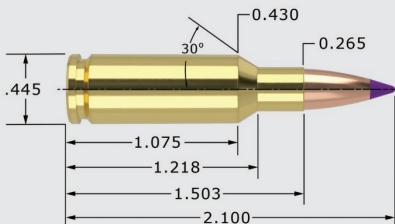

6mm PPC - 55 grain

6mm (.243")

MAXIMUM O.A.C.L.		2.100"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	BTLF	55gr. Spitzer	2.060"	0.288	0.133
Due to the longer bearing surface of Ballistic Tip Lead-Free bullets, always begin with starting loads.					
Ballistic Tip® Varmint	BTV	55gr. Spitzer	2.060"	0.276	0.133
Nosler®	CB0	55gr. FBSP	1.990"	0.203	0.133
Varmageddon®	VMG	55gr. FB Tipped	1.990"	0.252	0.133

CASE TYPE:	Sako	PRIMER TYPE	Rem 7 1/2
CASE HOLDS:	30.5 Gr. WATER	BARREL Length/Make	22" Wiseman
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2015	27.0 * MAX. 3227		** 101%
	26.0 3073		97%
	25.0 2918		93%
N120	24.0 * MAX. 3266		96%
	23.0 3138		92%
	22.0 3010		88%
W748	31.0 * MAX. 3281		** 106%
	30.0 3161		** 102%
	29.0 3042		99%
X-Terminator	29.0 MAX. 3297		98%
	28.0 * 3175		94%
	27.0 3053		91%
N130	26.5 * MAX. 3320		** 102%
	25.5 3188		98%
	24.5 3056		95%
H322 Most Accurate Powder Tested	28.5 * MAX. 3348		** 101%
	27.5 3208		97%
	26.5 3069		94%
RL10x	27.5 MAX. 3351		** 101%
	26.5 3218		98%
	25.5 * 3085		94%
AA 2230	30.0 * MAX. 3357		100%
	29.0 3216		97%
	28.0 3075		94%
RL7	26.5 * MAX. 3395		94%
	25.5 3258		91%
	24.5 3120		87%
IMR 4198	25.5 MAX. 3428		97%
	24.5 3281		93%
	23.5 * 3134		89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load