


Cartridge

6mm PPC - 70 grain

Version 9.0

NOSLER®

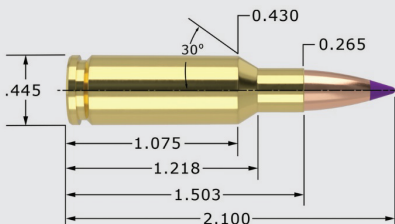

6mm PPC - 70 grain

6mm (.243")

MAXIMUM O.A.C.L.		2.100"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV	70gr. Spitzer	2.060"	0.310	0.169
Varmageddon®	VMG	70gr. FB Tipped	2.060"	0.305	0.169
CASE TYPE:	Sako		PRIMER TYPE		Rem 7 1/2
CASE HOLDS:	29.4	Gr. WATER	BARREL Length/Make		22" Wiseman
			BARREL Twist		1-14"
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
N120	22.5 * MAX.	2925	93%		
	21.5	2812	89%		
	20.5	2698	85%		
W748	28.5 * MAX.	2960	** 101%		
	27.5	2850	97%		
	26.5	2740	94%		
N130	25.0 * MAX.	3019	100%		
	24.0	2896	96%		
	23.0	2774	92%		
AA 2015	27.0 MAX.	3052	** 104%		
	26.0	2943	100%		
	25.0 *	2833	97%		
RL7	24.5 MAX.	3082	91%		
	23.5	2957	87%		
	22.5 *	2832	83%		
H322 Most Accurate Powder Tested	25.5 MAX.	3088	94%		
	24.5	2983	90%		
	23.5 *	2878	86%		
RL10x	25.5 MAX.	3109	97%		
	24.5	2967	94%		
	23.5 *	2826	90%		
H335	28.5 * MAX.	3130	98%		
	27.5	3030	95%		
	26.5	2930	92%		
AA 2230	29.5 * MAX.	3192	** 102%		
	28.5	3097	99%		
	27.5	3002	95%		
AA 2460	29.5 MAX.	3250	** 101%		
	28.5	3160	98%		
	27.5 *	3070	94%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load