


Cartridge

6mm Rem - 55 grain

Version 9.0

NOSLER®

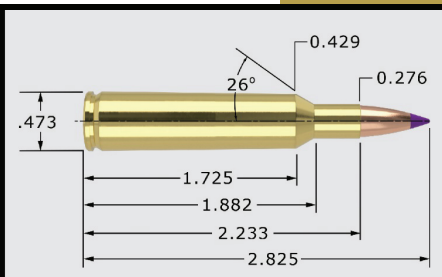

6mm Rem - 55 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	2.825"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	BTLF 55gr. Spitzer	2.770"	0.288	0.133
Due to the longer bearing surface of Ballistic Tip Lead-Free bullets, always begin with starting loads.				
Ballistic Tip® Varmint	BTV 55gr. Spitzer	2.770"	0.276	0.133
Nosler®	CRD 55gr. FBSP	2.620"	0.203	0.133
Varmageddon®	VMG 55gr. FB Tipped	2.720"	0.252	0.133

CASE TYPE:	Remington	PRIMER TYPE	Fed 210M
CASE HOLDS:	55.5 Gr. WATER	BARREL Length/Make	24" Shilen
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4831	52.0 MAX. 3710		100%
	50.0 3540		96%
	48.0 * 3370		92%
IMR 4350	52.0 MAX. 3808		100%
	50.0 3636		96%
	48.0 * 3464		92%
RL19	53.0 MAX. 3912		** 104%
	51.0 3729		100%
	49.0 * 3545		96%
H414	53.0 * MAX. 3961		99%
	51.0 3760		96%
	49.0 3560		92%
N150	47.5 * MAX. 3975		** 101%
	45.5 3782		96%
	43.5 3589		92%
RL15	46.5 MAX. 3987		87%
	44.5 3754		84%
	42.5 * 3520		80%
Varget	47.0 * MAX. 4002		92%
	45.0 3831		88%
	43.0 3661		84%
H380	53.0 * MAX. 4019		** 101%
	51.0 3885		97%
	49.0 3751		93%
W760	53.0 * MAX. 4077		100%
	Most Accurate 51.0 3875		96%
	Powder Tested 49.0 3674		92%
Big Game	52.0 MAX. 4087		96%
	50.0 3948		92%
	48.0 * 3810		88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load