


# Cartridge

6mm Rem - 85/90 grain

Version 9.0

# NOSLER®

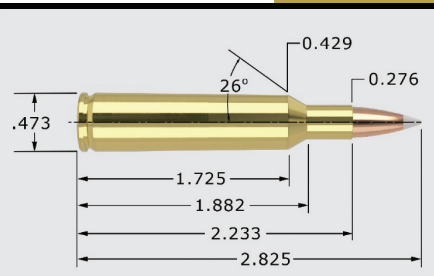

6mm Rem - 85/90 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	2.825"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	<b>PT</b> 85gr. Spitzer	2.770"	0.315	0.206
AccuBond®	<b>AB</b> 90gr. Spitzer	2.770"	0.376	0.218
Ballistic Tip®	<b>BT</b> 90gr. Spitzer	2.770"	0.365	0.218
Expansion Tip®	<b>ET</b> 90gr. Spitzer	2.770"	0.403	0.218

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Remington	PRIMER TYPE	Fed 210M
CASE HOLDS:	52.0 Gr. WATER	BARREL Length/Make	24" Shilen
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 3031</b>	37.5 MAX. 3178	[Bar]	80%
	35.5 3043	[Bar]	76%
	33.5 * 2908	[Bar]	72%
<b>Varget</b>	39.0 * MAX. 3201	[Bar]	81%
	37.0 3055	[Bar]	77%
	35.0 2910	[Bar]	73%
<b>H380</b>	41.5 MAX. 3210	[Bar]	84%
	39.5 3060	[Bar]	80%
	37.5 * 2910	[Bar]	76%
<b>IMR 4064</b>	39.5 MAX. 3223	[Bar]	84%
	37.5 3073	[Bar]	80%
	35.5 * 2923	[Bar]	75%
<b>Big Game</b>	44.5 MAX. 3228	[Bar]	87%
	42.5 * 3145	[Bar]	83%
	40.5 3062	[Bar]	79%
<b>IMR 4350</b>	45.0 * MAX. 3288	[Bar]	93%
	43.0 3123	[Bar]	88%
	41.0 2958	[Bar]	84%
<b>IMR 4831</b>	47.5 * MAX. 3300	[Bar]	98%
	Most Accurate 45.5 3140	[Bar]	94%
	Powder Tested 43.5 2980	[Bar]	89%
<b>N160</b>	47.0 MAX. 3319	[Bar]	100%
	45.0 3184	[Bar]	96%
	43.0 * 3050	[Bar]	92%
<b>RL19</b>	49.0 * MAX. 3370	[Bar]	** 102%
	47.0 3200	[Bar]	98%
	45.0 3030	[Bar]	94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load