


Cartridge

6mm Rem - 95/100 grain

Version 9.0

NOSLER®

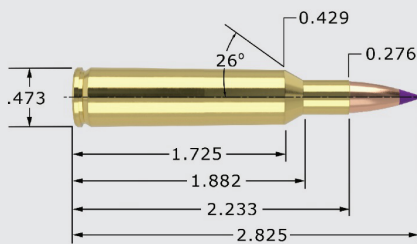

6mm Rem - 95/100 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	95gr. Spitzer	2.770"	0.379	0.230
CT® Ballistic Silvertip®	BST	95gr. Spitzer	2.770"	0.379	0.230
Partition®	PT	95gr. Spitzer	2.770"	0.365	0.230
Partition®	PT	100gr. Spitzer	2.770"	0.384	0.242
CASE TYPE:	Remington	PRIMER TYPE	Fed 210M		
CASE HOLDS:	51.8 Gr. WATER	BARREL Length/Make	24" Shilen		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H380	37.0 MAX.	2860	75%		
	35.0	2711	71%		
	33.0 *	2562	67%		
IMR 4895	36.5 * MAX.	2934	77%		
	34.5	2801	72%		
	32.5	2668	68%		
IMR 3031	36.0 MAX.	2994	77%		
	34.0	2837	73%		
	32.0 *	2680	69%		
N160	44.0 MAX.	3048	94%		
	42.0	2913	90%		
	40.0 *	2779	86%		
IMR 4350	43.0 * MAX.	3069	89%		
	41.0	2950	85%		
	39.0	2831	81%		
Big Game	43.0 MAX.	3096	85%		
	41.0	2992	81%		
	39.0 *	2888	77%		
IMR 7828	49.0 MAX.	3141	**	101%	
	47.0	2982	97%		
	45.0 *	2822	92%		
RL19	46.0 MAX.	3158	97%		
	Most Accurate	3006	92%		
	Powder Tested	42.0 * 2855	88%		
RL22	48.0 * MAX.	3261	**	101%	
	46.0	3101	97%		
	44.0	2942	92%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load