


# Cartridge

6mm XC - 105/107 grain

Version 9.0

# NOSLER®

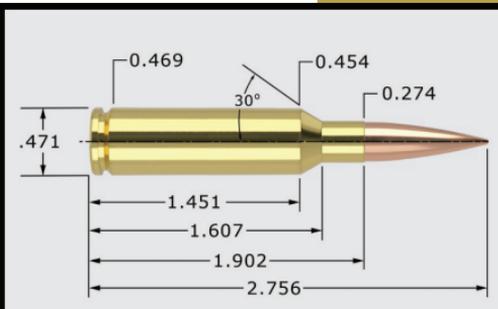

6mm XC - 105/107 grain

6mm (.243")

MAXIMUM O.A.C.L.		2.756"		TESTED O.A.C.L.	B.C.	S.D.
Reduced Drag Factor™	RDF	105gr. HPBT	2.730"	0.571	0.254	
Custom Competition®	CC	107gr. HPBT	2.730"	0.525	0.259	
CASE TYPE:	Norma	PRIMER TYPE	WRL			
CASE HOLDS:	45.4 Gr. WATER	BARREL Length/Make	26" Bartlein			
		BARREL Twist	1-8"			
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
<b>IMR 4955</b>	38.5 MAX. 2911		90%			
	36.5 * 2780		86%			
	34.5 2649		81%			
<b>W760</b>	39.0 MAX. 3008		90%			
	37.0 * 2873		85%			
	35.0 2739		81%			
<b>Hunter</b>	40.5 MAX. 3009		92%			
	38.5 * 2888		87%			
	36.5 2766		83%			
<b>IMR 4350</b>	38.5 MAX. 3012		91%			
	36.5 * 2864		86%			
	34.5 2715		81%			
<b>Norma 204</b>	40.0 * MAX. 3033		98%			
	38.0 2890		93%			
	36.0 2746		88%			
<b>Hybrid 100V</b>	38.0 MAX. 3043		86%			
	36.0 * 2905		82%			
	34.0 2768		77%			
<b>RL17</b>	38.5 MAX. 3085		88%			
	36.5 * 2936		83%			
	34.5 2786		79%			
<b>AA 2700</b>	40.0 * MAX. 3087		92%			
	38.0 2957		87%			
	36.0 2827		83%			
<b>IMR 4831</b>	39.5 MAX. 3088		93%			
	37.5 2923		88%			
	35.5 * 2759		84%			
<b>RL19</b>	42.5 MAX. 3121		**	102%		
Most Accurate	40.5 2969			97%		
Powder Tested	38.5 * 2816			92%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested  
 \*\* = Compressed load