


Cartridge

6mm XC - 115 grain

Version 9.0

NOSLER[®]

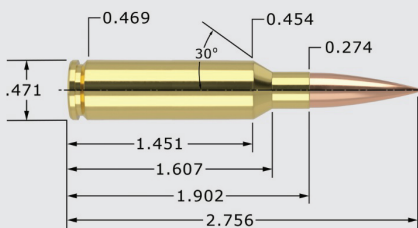

6mm XC - 115 grain

6mm (.243")

MAXIMUM O.A.C.L.		2.756"		TESTED O.A.C.L.	B.C.	S.D.
Reduced Drag Factor™		RDF	115gr. HPBT	2.730"	0.634	0.278
CASE TYPE:	Norma		PRIMER TYPE		WLR	
CASE HOLDS:	44.1	Gr. WATER	BARREL Length/Make		26" Bartlein	
			BARREL Twist		1-8"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4955	37.5	MAX. 2796	<div style="width: 90%;"></div>	90%		
	35.5	2670	<div style="width: 86%;"></div>	86%		
	33.5 *	2544	<div style="width: 81%;"></div>	81%		
W760	37.0	MAX. 2816	<div style="width: 88%;"></div>	88%		
	35.0 *	2702	<div style="width: 83%;"></div>	83%		
	33.0	2588	<div style="width: 78%;"></div>	78%		
IMR 4350	36.0	MAX. 2830	<div style="width: 87%;"></div>	87%		
	34.0 *	2710	<div style="width: 82%;"></div>	82%		
	32.0	2590	<div style="width: 78%;"></div>	78%		
Hunter	38.0 *	MAX. 2848	<div style="width: 89%;"></div>	89%		
Most Accurate	36.0	2730	<div style="width: 84%;"></div>	84%		
Powder Tested	34.0	2612	<div style="width: 79%;"></div>	79%		
IMR 4831	37.0	MAX. 2869	<div style="width: 90%;"></div>	90%		
	35.0	2735	<div style="width: 85%;"></div>	85%		
	33.0 *	2601	<div style="width: 80%;"></div>	80%		
Hybrid 100V	36.0 *	MAX. 2870	<div style="width: 84%;"></div>	84%		
	34.0	2749	<div style="width: 79%;"></div>	79%		
	32.0	2629	<div style="width: 75%;"></div>	75%		
Norma 204	38.0	MAX. 2871	<div style="width: 96%;"></div>	96%		
	36.0 *	2754	<div style="width: 91%;"></div>	91%		
	34.0	2637	<div style="width: 86%;"></div>	86%		
AA 2700	37.5	MAX. 2879	<div style="width: 89%;"></div>	89%		
	35.5 *	2766	<div style="width: 84%;"></div>	84%		
	33.5	2653	<div style="width: 79%;"></div>	79%		
N550	36.0	MAX. 2884	<div style="width: 91%;"></div>	91%		
	34.0	2753	<div style="width: 86%;"></div>	86%		
	32.0 *	2623	<div style="width: 81%;"></div>	81%		
IMR 4451	38.0 *	MAX. 2884	<div style="width: 92%;"></div>	92%		
	36.0	2755	<div style="width: 87%;"></div>	87%		
	34.0	2626	<div style="width: 82%;"></div>	82%		
RL17	36.5 *	MAX. 2923	<div style="width: 86%;"></div>	86%		
	34.5	2816	<div style="width: 81%;"></div>	81%		
	32.5	2709	<div style="width: 76%;"></div>	76%		
RL19	40.0	MAX. 2939	<div style="width: 99%;"></div>	99%		
	38.0 *	2810	<div style="width: 94%;"></div>	94%		
	36.0	2682	<div style="width: 89%;"></div>	89%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load