


# Cartridge

6mm XC - 85/90 grain

Version 9.0

# NOSLER®

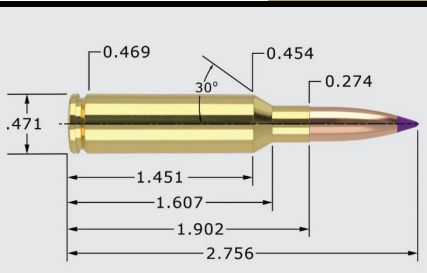

6mm XC - 85/90 grain

6mm (.243")

MAXIMUM O.A.C.L.		2.756"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	<b>PT</b>	85gr. Spitzer	2.700"	0.315	0.206
AccuBond®	<b>AB</b>	90gr. Spitzer	2.730"	0.376	0.218
Ballistic Tip®	<b>BT</b>	90gr. Spitzer	2.730"	0.365	0.218
Expansion Tip®	<b>ET</b>	90gr. Spitzer	2.700"	0.403	0.218

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Norma	PRIMER TYPE	WLR
CASE HOLDS:	47.6 Gr. WATER	BARREL Length/Make	26" Bartlein
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4955</b>	42.0 * MAX.	3155	94%
	40.0	3022	89%
	38.0	2888	85%
<b>Hybrid 100V</b>	39.5 MAX.	3213	86%
	37.5 *	3057	81%
	35.5	2901	77%
<b>IMR 4350</b>	41.0 MAX.	3250	92%
	39.0 *	3090	88%
	37.0	2930	83%
<b>W760</b>	41.5 * MAX.	3258	91%
	39.5	3112	87%
	37.5	2965	82%
<b>AA 2700</b>	41.5 MAX.	3261	91%
	39.5	3125	86%
	37.5 *	2989	82%
<b>Norma 204</b>	42.5 MAX.	3263	99%
	40.5 *	3107	95%
	38.5	2951	90%
<b>RL16</b>	41.0 * MAX.	3275	97%
	39.0	3139	92%
	37.0	3003	87%
<b>Hunter</b>	43.5 MAX.	3279	94%
	41.5 *	3134	90%
	39.5	2989	86%
<b>RL17</b>	40.5 MAX.	3297	88%
	38.5 *	3141	84%
	36.5	2984	79%
<b>IMR 4831</b>	42.0 MAX.	3313	94%
	40.0 *	3133	90%
	38.0	2953	85%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load