


# Cartridge

6mm XC - 95/100 grain

Version 9.0

# NOSLER®

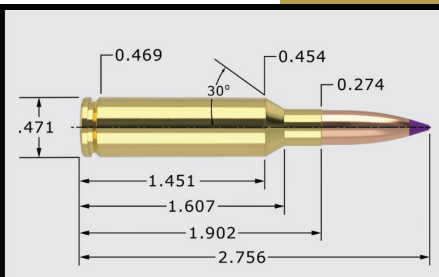

6mm XC - 95/100 grain

6mm (.243")

MAXIMUM O.A.C.L.		2.756"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	<b>BT</b>	95gr. Spitzer	2.730"	0.379	0.230
CT® Ballistic Silvertip®	<b>BST</b>	95gr. Spitzer	2.730"	0.379	0.230
Partition®	<b>PT</b>	95gr. Spitzer	2.730"	0.365	0.230
Partition®	<b>PT</b>	100gr. Spitzer	2.730"	0.384	0.242

CASE TYPE:	Norma	PRIMER TYPE	WRL
CASE HOLDS:	46.9 Gr. WATER	BARREL Length/Make	26" Bartlein
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4955</b>	39.5 * MAX. 2995		90%
	37.5 2865		85%
	35.5 2735		81%
<b>IMR 4350</b>	39.0 * MAX. 3062		89%
	37.0 2919		84%
	35.0 2777		80%
<b>AA 2700</b>	40.0 *, MAX. 3088		89%
	Most Accurate 38.0 2952		84%
	Powder Tested 36.0 2815		80%
<b>Norma 204</b>	41.0 * MAX. 3090		97%
	39.0 2923		92%
	37.0 2757		88%
<b>IMR 4831</b>	40.0 * MAX. 3111		91%
	38.0 2947		87%
	36.0 2783		82%
<b>Hybrid 100V</b>	38.5 MAX. 3125		85%
	36.5 * 2988		80%
	34.5 2850		76%
<b>W760</b>	40.0 MAX. 3128		89%
	38.0 * 3017		85%
	36.0 2905		80%
<b>RL19</b>	43.0 * MAX. 3141		100%
	41.0 2984		95%
	39.0 2826		90%
<b>Hunter</b>	41.5 * MAX. 3143		91%
	39.5 3007		87%
	37.5 2871		82%
<b>RL17</b>	39.0 MAX. 3157		86%
	37.0 * 2986		82%
	35.0 2816		77%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load