


Cartridge

7mm-08 Rem - 175 grain

Version 9.0

NOSLER®

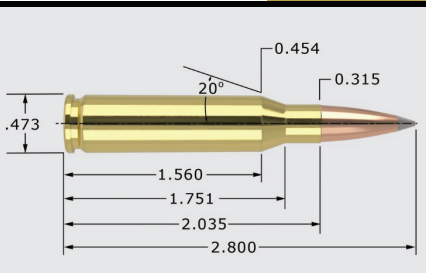

7mm-08 Rem - 175 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.800"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	175gr. Spitzer	2.800"	0.648	0.310
Partition®	PT	175gr. Spitzer	2.800"	0.519	0.310
CASE TYPE:	Nosler	PRIMER TYPE	WLR		
CASE HOLDS:	47.2 Gr. WATER	BARREL Length/Make	26" Wiseman		
		BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4895	37.0 MAX.	2472	85%		
	35.0	2357	81%		
	33.0 *	2242	76%		
N160	43.5 MAX.	2479	** 102%		
	Most Accurate	2383	98%		
	Powder Tested	39.5 * 2288	93%		
H414	42.0 MAX.	2488	93%		
	40.0	2363	88%		
	38.0 *	2238	84%		
H4831	45.0 MAX.	2512	99%		
	43.0	2412	95%		
	41.0 *	2313	90%		
W760	41.5 * MAX.	2532	92%		
	39.5	2430	88%		
	37.5	2328	83%		
IMR 4350	43.0 * MAX.	2541	97%		
	41.0	2427	93%		
	39.0	2313	88%		
RL19	46.0 MAX.	2609	** 106%		
	44.0 *	2498	** 101%		
	42.0	2387	97%		
IMR 4831	45.0 MAX.	2612	** 102%		
	43.0	2497	97%		
	41.0 *	2382	93%		
Hunter	46.0 MAX.	2628	100%		
	44.0	2536	96%		
	42.0 *	2444	92%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load