


Cartridge

7mm (7x57) - 120 grain

Version 9.0

NOSLER®

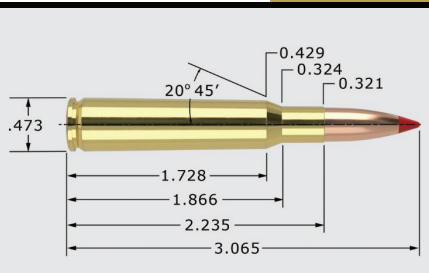

7mm (7x57) - 120 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.065"	TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip®		BT	120gr. Spitzer	3.045"	0.417	0.213
CASE TYPE:	Winchester		PRIMER TYPE	WLR		
CASE HOLDS:	54.3	Gr. WATER	BARREL Length/Make	22" Lilja		
			BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
IMR 4831	52.0 * MAX.	2830	** 102%			
	50.0	2750	98%			
	48.0	2670	95%			
H380	47.5 MAX.	2922	92%			
	45.5	2797	88%			
	43.5 *	2672	84%			
BL-C(2)	44.5 * MAX.	2928	83%			
	42.5	2793	79%			
	40.5	2658	76%			
Varget	45.0 MAX.	2929	90%			
Most Accurate	43.0 *	2823	86%			
Powder Tested	41.0	2718	82%			
IMR 4064	47.0 MAX.	3000	96%			
	45.0	2870	92%			
	43.0 *	2740	88%			
RL15	44.5 * MAX.	3001	85%			
	42.5	2931	82%			
	40.5	2861	78%			
IMR 4320	47.0 * MAX.	3008	94%			
	45.0	2883	90%			
	43.0	2758	86%			
IMR 4895	45.0 MAX.	3020	90%			
	43.0	2880	86%			
	41.0 *	2740	82%			
Hunter	53.5 MAX.	3043	** 102%			
	51.5 *	2916	98%			
	49.5	2790	94%			
N150	46.5 MAX.	3047	** 101%			
	44.5	2944	96%			
	42.5 *	2841	92%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load