


# Cartridge

## 7mm (7x57) - 140 grain

Version 9.0

# NOSLER®

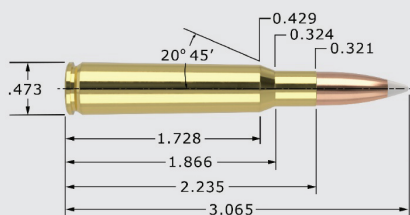

## 7mm (7x57) - 140 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.065"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	140gr. Spitzer	3.065"	0.485	0.248
Ballistic Tip®	<b>BT</b>	140gr. Spitzer	3.065"	0.485	0.248
CT® Ballistic Silvertip®	<b>BST</b>	140gr. Spitzer	3.065"	0.485	0.248
Expansion Tip®	<b>ET</b>	140gr. Spitzer	3.015"	0.489	0.248
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	140gr. Spitzer	3.065"	0.434	0.248

CASE TYPE:	Winchester	PRIMER TYPE	WLR
CASE HOLDS:	52.5 Gr. WATER	BARREL Length/Make	22" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL15</b>	42.0 MAX. 2694		83%
	40.0 * 2596		79%
	38.0 2499		75%
<b>IMR 4064</b>	42.0 * MAX. 2712		88%
	40.0 2607		84%
	38.0 2502		80%
<b>IMR 4895</b>	40.0 * MAX. 2720		83%
	38.0 2590		79%
	36.0 2460		75%
<b>IMR 4831</b>	51.0 * MAX. 2762		** 104%
	49.0 2637		100%
	47.0 2512		96%
<b>IMR 4320</b>	43.0 MAX. 2766		89%
	41.0 2642		85%
	39.0 * 2519		81%
<b>Hunter</b>	49.5 MAX. 2769		97%
	47.5 * 2681		93%
	45.5 2594		89%
<b>N150</b>	43.5 MAX. 2779		97%
	41.5 2686		93%
	39.5 * 2594		89%
<b>H414</b>	49.0 MAX. 2790		97%
	Most Accurate Powder Tested 47.0 2700		93%
	45.0 * 2610		89%
<b>IMR 4350</b>	49.0 * MAX. 2820		100%
	47.0 2680		96%
	45.0 2540		92%
<b>RL19</b>	51.5 MAX. 2892		** 107%
	49.5 2787		** 102%
	47.5 * 2683		98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load