


Cartridge

7mm (7x57) - 150 grain

Version 9.0

NOSLER®

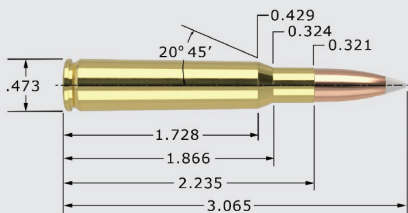

7mm (7x57) - 150 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.065"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	3.045"	0.493	0.266
AccuBond® Long Range	ABLR	150gr. Spitzer	3.045"	0.546	0.266
Ballistic Tip®	BT	150gr. Spitzer	3.045"	0.493	0.266
CT® Ballistic Silvertip®	BST	150gr. Spitzer	3.045"	0.493	0.266
Expansion Tip®	ET	150gr. Spitzer	3.015"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	3.045"	0.456	0.266

CASE TYPE:	Winchester		PRIMER TYPE	WLR
CASE HOLDS:	51.4	Gr. WATER	BARREL Length/Make	22" Lilja
			BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	49.0	MAX. 2568		99%
	Most Accurate		2487	95%
	Powder Tested	45.0 *	2406	91%
IMR 4895	38.5	MAX. 2590		82%
	36.5		2410	77%
	34.5 *		2230	73%
IMR 4064	41.0 *	MAX. 2600		88%
	39.0		2490	84%
	37.0		2380	80%
H414	48.5	MAX. 2610		98%
	46.5		2570	94%
	44.5 *		2530	90%
IMR 4320	42.0	MAX. 2612		89%
	40.0		2517	85%
	38.0 *		2422	80%
W760	46.0 *	MAX. 2635		94%
	44.0		2544	90%
	42.0		2454	86%
Hunter	48.5	MAX. 2683		97%
	46.5		2599	93%
	44.5 *		2516	89%
IMR 4350	48.0	MAX. 2730		100%
	46.0		2580	96%
	44.0 *		2430	92%
N160	50.0	MAX. 2770		** 108%
	48.0		2670	** 104%
	46.0 *		2569	99%
RL19	51.0	MAX. 2831		** 108%
	49.0		2718	** 104%
	47.0 *		2605	99%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load