


Cartridge

7mm (7x57) - 160 grain

Version 9.0

NOSLER®

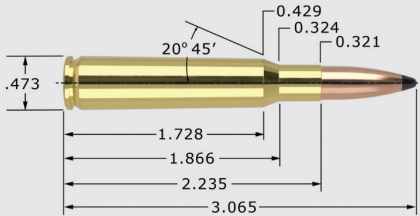

7mm (7x57) - 160 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.				3.065"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond®				AB	160gr. Spitzer	3.045"	0.531	0.283
Partition®				PT	160gr. Spitzer	3.045"	0.475	0.283
CASE TYPE:		Winchester		PRIMER TYPE			WLR	
CASE HOLDS:		50.6	Gr. WATER	BARREL Length/Make			22" Lilja	
				BARREL Twist			1-9"	
POWDER TYPE		POWDER CHG. GRS.		MUZZLE VEL. F.P.S.			LOAD DENSITY (VOLUME)	
IMR 4895	38.0	MAX.	2448				82%	
	36.0		2333				77%	
	34.0	*	2218				73%	
IMR 4064	39.0	MAX.	2450				85%	
	37.0		2360				81%	
	35.0	*	2270				76%	
H414	45.0	* MAX.	2490				93%	
	43.0		2380				89%	
	41.0		2270				84%	
W760	43.0	MAX.	2490				89%	
	41.0		2386				85%	
	39.0	*	2282				81%	
Hunter	46.0	* MAX.	2536				94%	
	44.0		2431				90%	
	42.0		2327				86%	
IMR 4320	41.0	MAX.	2580				88%	
	39.0		2470				84%	
	37.0	*	2360				79%	
IMR 4350 Most Accurate Powder Tested	46.0	* MAX.	2622				97%	
	44.0		2517				93%	
	42.0		2412				89%	
RL19	47.5	MAX.	2643				**	102%
	45.5		2532					98%
	43.5	*	2421					93%
IMR 4831	49.0	MAX.	2648				**	104%
	47.0		2523					99%
	45.0	*	2398					95%
N160	48.5	MAX.	2686				**	106%
	46.5		2603				**	102%
	44.5	*	2520					98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load