


Cartridge

7mm (7x57) - 175 grain

Version 9.0

NOSLER®

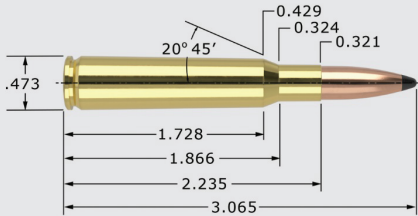

7mm (7x57) - 175 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.				3.065"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range			ABLR	175gr. Spitzer	3.045"	0.648	0.310
Partition®			PT	175gr. Spitzer	3.045"	0.519	0.310
CASE TYPE:		Winchester		PRIMER TYPE		WLR	
CASE HOLDS:		48.7	Gr. WATER	BARREL Length/Make		22" Lilja	
				BARREL Twist		1-9"	
POWDER TYPE	POWDER CHG. GRS.			MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
W760	42.0	MAX.	2376		90%		
	40.0	*	2292		86%		
	38.0		2208		82%		
Hunter	44.5	MAX.	2396		94%		
	42.5		2317		90%		
	40.5	*	2238		86%		
IMR 4895	37.0	MAX.	2420		83%		
	35.0		2270		78%		
	33.0	*	2120		74%		
IMR 4064	39.0	* MAX.	2438		88%		
	37.0		2303		84%		
	35.0		2168		79%		
H414	44.0	MAX.	2460		94%		
	42.0		2390		90%		
	40.0	*	2320		86%		
IMR 4320	40.0	* MAX.	2480		89%		
	38.0		2400		85%		
	36.0		2320		80%		
IMR 4831	47.0	* MAX.	2498		**	103%	
	45.0		2373			99%	
	43.0		2248			94%	
IMR 4350	45.0	MAX.	2520			99%	
	43.0		2430			94%	
	41.0	*	2340			90%	
RL22	47.5	* MAX.	2539		**	106%	
	45.5		2440		**	102%	
	43.5		2340			97%	
N165	50.5	* MAX.	2574		**	115%	
Most Accurate	48.5		2482		**	111%	
Powder Tested	46.5		2391		**	106%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
** = Compressed load