


Cartridge

7mm Rem Ultra Mag - 140 grain

Version 9.0

NOSLER®

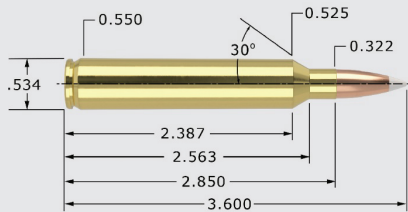

7mm Rem Ultra Mag - 140 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	140gr. Spitzer	3.570"	0.485	0.248
Ballistic Tip®	BT	140gr. Spitzer	3.570"	0.485	0.248
CT® Ballistic Silvertip®	BST	140gr. Spitzer	3.570"	0.485	0.248
Expansion Tip®	ET	140gr. Spitzer	3.540"	0.489	0.248
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	140gr. Spitzer	3.570"	0.434	0.248

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	105.8 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
H4831	89.0 * MAX.	3335	88%	
	87.0	3289	86%	
	85.0	3243	84%	
Magnum	94.0 MAX.	3361	90%	
	92.0	3325	88%	
	90.0 *	3290	86%	
US869	108.0 * MAX.	3375	** 105%	
	106.0	3305	** 103%	
	104.0	3234	** 101%	
H1000	95.0 * MAX.	3421	95%	
	93.0	3346	93%	
	91.0	3271	91%	
RL22	90.0 * MAX.	3424	92%	
	88.0	3369	90%	
	86.0	3314	88%	
N560	90.0 MAX.	3427	95%	
	88.0	3372	92%	
	86.0 *	3316	90%	
IMR 7828	89.0 MAX.	3458	89%	
	87.0	3368	87%	
	85.0 *	3277	85%	
RL25	91.0 MAX.	3477	93%	
	Most Accurate	89.0	3407	91%
	Powder Tested	87.0 *	3338	89%
Retumbo	96.0 MAX.	3481	98%	
	94.0	3381	96%	
	92.0 *	3281	94%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
 ** = Compressed load