


# Cartridge

## 7mm Rem Ultra Mag - 150 grain

Version 9.0

# NOSLER®

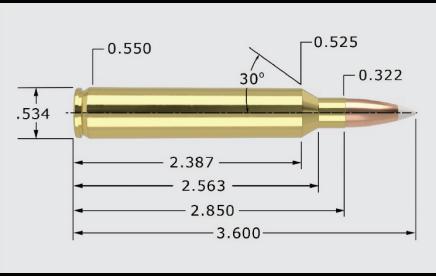

## 7mm Rem Ultra Mag - 150 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	150gr. Spitzer	3.570"	0.493	0.266
AccuBond® Long Range	<b>ABLR</b>	150gr. Spitzer	3.570"	0.546	0.266
Ballistic Tip®	<b>BT</b>	150gr. Spitzer	3.570"	0.493	0.266
CT® Ballistic Silvertip®	<b>BST</b>	150gr. Spitzer	3.570"	0.493	0.266
Expansion Tip®	<b>ET</b>	150gr. Spitzer	3.540"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	150gr. Spitzer	3.570"	0.456	0.266

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	105.4 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>N165</b>	86.0 MAX. 3181		91%
	84.0 3114		89%
	82.0 * 3048		86%
<b>H4831</b>	85.0 MAX. 3200		84%
	83.0 3157		82%
	81.0 * 3115		80%
<b>Hybrid 100V</b>	76.0 MAX. 3224		74%
	74.0 3166		72%
	72.0 * 3108		70%
<b>RL22</b>	85.5 * MAX. 3265		88%
	Most Accurate 83.5 3209		86%
	Powder Tested 81.5 3153		84%
<b>H1000</b>	92.0 MAX. 3265		92%
	90.0 3212		90%
	88.0 * 3158		88%
<b>US869</b>	104.5 MAX. 3287		** 102%
	102.5 3208		100%
	100.5 * 3129		98%
<b>IMR 7828</b>	87.0 MAX. 3336		88%
	85.0 3252		86%
	83.0 * 3169		84%
<b>RL25</b>	88.0 MAX. 3336		91%
	86.0 * 3273		89%
	84.0 3210		87%
<b>Retumbo</b>	94.0 MAX. 3364		96%
	92.0 * 3270		94%
	90.0 3175		92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load