


Cartridge

7mm Rem Ultra Mag - 160 grain

Version 9.0

NOSLER®

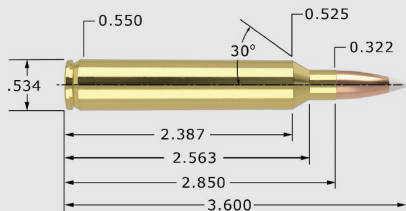

7mm Rem Ultra Mag - 160 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	160gr. Spitzer	3.570"	0.531	0.283
Partition®	PT	160gr. Spitzer	3.570"	0.475	0.283
CASE TYPE:	Nosler		PRIMER TYPE	WLRM	
CASE HOLDS:	103.9	Gr. WATER	BARREL Length/Make	26" Wiseman	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H4831	83.0 * MAX.	3115	83%		
		3068	81%		
		3022	79%		
RL19	82.0	MAX. 3151	86%		
	80.0	3085	84%		
	78.0 *	3020	82%		
Magnum	90.0	MAX. 3185	88%		
	88.0	3106	86%		
	86.0 *	3028	84%		
N560	85.0	MAX. 3185	91%		
	83.0	3121	89%		
	81.0 *	3057	87%		
RL22	84.0	MAX. 3188	88%		
	82.0	3124	86%		
	80.0 *	3059	84%		
H1000	90.0 * MAX.	3188	92%		
		3137	90%		
		3086	88%		
IMR 7828 Most Accurate Powder Tested	85.0	MAX. 3225	87%		
	83.0	3140	85%		
	81.0 *	3055	83%		
Retumbo	92.0 * MAX.	3228	95%		
		3161	93%		
		3095	91%		
US869	103.0 * MAX.	3239	**	102%	
		3156	100%		
		3073	98%		
RL25	88.0	MAX. 3258	92%		
	86.0	3201	90%		
	84.0 *	3144	88%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load