


# Cartridge

## 7mm Rem Ultra Mag - 185 grain

Version 9.0

# NOSLER<sup>®</sup>

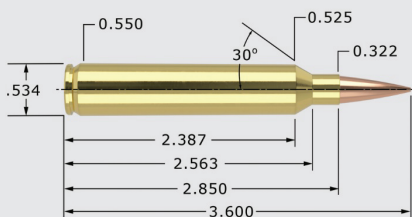

## 7mm Rem Ultra Mag - 185 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.600"		TESTED O.A.C.L.	B.C.	S.D.
Reduced Drag Factor™		RDF	175gr. HPBT	3.570"	0.719	0.328
CASE TYPE:	Nosler		PRIMER TYPE		WLRM	
CASE HOLDS:	99.0	Gr. WATER	BARREL Length/Make		24" Wiseman	
			BARREL Twist		1-9 1/2"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)	
<b>IMR 7977</b>	81.0	MAX.	2892		88%	
	79.0	*	2811		86%	
	77.0		2730		84%	
<b>H1000</b>	82.5	MAX.	2919		88%	
	80.5	*	2847		86%	
	78.5		2774		84%	
<b>MAGPRO</b>	80.5	* MAX.	2921		84%	
	78.5		2860		82%	
	76.5		2799		80%	
<b>RL26</b>	79.5	MAX.	2935		82%	
	77.5	*	2868		80%	
	75.5		2801		78%	
<b>H50BMG</b>	97.5	MAX.	2935		**	102%
	95.5		2870		100%	
	93.5	*	2805		98%	
<b>Magnum</b>	85.0	* MAX.	2937		87%	
	83.0		2870		85%	
	81.0		2804		83%	
<b>RL25</b>	85.0	MAX.	2971		93%	
	83.0	*	2893		91%	
	81.0		2815		89%	
<b>Returnbo</b>	86.5	MAX.	2982		94%	
	84.5	*	2903		92%	
	82.5		2824		90%	
<b>LRT</b>	94.5	* MAX.	3002		95%	
	92.5		2935		93%	
	90.5		2868		91%	
<b>US869</b>	95.5	MAX.	3057		99%	
	93.5	*	2978		97%	
	91.5		2899		95%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load