


Cartridge

7mm Rem Mag - 140 grain

Version 9.0

NOSLER®

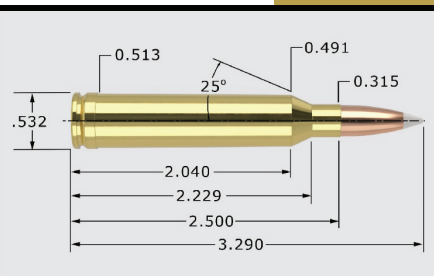

7mm Rem Mag - 140 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.290"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	140gr. Spitzer	3.290"	0.485	0.248
Ballistic Tip®	BT	140gr. Spitzer	3.290"	0.485	0.248
CT® Ballistic Silvertip®	BST	140gr. Spitzer	3.290"	0.485	0.248
Expansion Tip®	ET	140gr. Spitzer	3.260"	0.489	0.248
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	140gr. Spitzer	3.290"	0.434	0.248

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	77.8 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N165 Most Accurate Powder Tested	66.0 MAX. 3061		94%
	64.0 2982		91%
	62.0 * 2903		89%
IMR 4064	56.0 MAX. 3088		80%
	54.0 2983		77%
	52.0 * 2878		74%
IMR 4320	57.0 MAX. 3110		80%
	55.0 3010		77%
	53.0 * 2910		74%
IMR 4895	54.0 MAX. 3128		76%
	52.0 3023		73%
	50.0 * 2918		70%
N160	65.5 MAX. 3136		94%
	63.5 * 3043		91%
	61.5 2951		88%
IMR 4831	66.0 MAX. 3220		91%
	64.0 3120		88%
	62.0 * 3020		85%
MAGPRO	75.5 MAX. 3260		100%
	73.5 * 3177		97%
	71.5 3093		95%
IMR 4350	65.0 * MAX. 3282		89%
	63.0 3207		87%
	61.0 3132		84%
RL19	65.5 * MAX. 3318		92%
	63.5 3243		89%
	61.5 3168		86%
RL22	67.5 MAX. 3340		94%
	65.5 3250		92%
	63.5 * 3160		89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load