


# Cartridge

## 7mm Rem Mag - 150 grain

Version 9.0

# NOSLER®

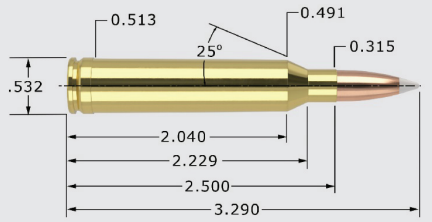

## 7mm Rem Mag - 150 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.290"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	150gr. Spitzer	3.290"	0.493	0.266
AccuBond® Long Range	<b>ABLR</b>	150gr. Spitzer	3.290"	0.546	0.266
Ballistic Tip®	<b>BT</b>	150gr. Spitzer	3.290"	0.493	0.266
CT® Ballistic Silvertip®	<b>BST</b>	150gr. Spitzer	3.290"	0.493	0.266
Expansion Tip®	<b>ET</b>	150gr. Spitzer	3.290"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	150gr. Spitzer	3.290"	0.456	0.266

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	78.0 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4064</b>	53.0 MAX. 2968		75%
	51.0 2873		72%
	49.0 * 2778		69%
<b>N165</b>	66.0 MAX. 3017		94%
	64.0 2941		91%
	62.0 * 2865		88%
<b>N160</b> Most Accurate Powder Tested	64.0 * MAX. 3046		91%
	62.0 2956		88%
	60.0 2867		85%
<b>IMR 4320</b>	55.0 MAX. 3048		77%
	53.0 2953		74%
	51.0 * 2858		71%
<b>H4831SC</b>	65.0 MAX. 3078		87%
	63.0 3018		84%
	61.0 * 2959		81%
<b>MAGPRO</b>	72.5 MAX. 3129		96%
	70.5 3065		93%
	68.5 * 3001		91%
<b>IMR 7828</b>	68.0 * MAX. 3168		93%
	66.0 3060		90%
	64.0 2953		87%
<b>IMR 4831</b>	65.0 MAX. 3240		89%
	63.0 3130		86%
	61.0 * 3020		84%
<b>IMR 4350</b>	63.0 * MAX. 3248		86%
	61.0 3138		84%
	59.0 3028		81%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load