


Cartridge

7mm Rem Mag - 160 grain

Version 9.0

NOSLER®

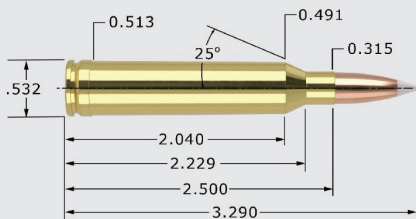

7mm Rem Mag - 160 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.290"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	160gr. Spitzer	3.290"	0.531	0.283
Partition®	PT	160gr. Spitzer	3.290"	0.475	0.283
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215		
CASE HOLDS:	80.4 Gr. WATER	BARREL Length/Make	24" Wiseman		
		BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
N165	61.0 * MAX. 2904		84%		
Most Accurate Powder Tested	59.0 2846		82%		
	57.0 2789		79%		
IMR 4064	53.0 * MAX. 2908		73%		
	51.0 2823		70%		
	49.0 2738		67%		
IMR 4350	60.0 * MAX. 2998		80%		
	58.0 2943		77%		
	56.0 2888		74%		
IMR 4831	63.0 * MAX. 3008		84%		
	61.0 2933		81%		
	59.0 2858		78%		
IMR 7828	64.0 MAX. 3014		85%		
	62.0 2936		82%		
	60.0 * 2858		79%		
RL19	61.5 * MAX. 3053		83%		
	59.5 2959		80%		
	57.5 2866		78%		
RL22	63.0 MAX. 3058		85%		
	61.0 2963		82%		
	59.0 * 2868		80%		
RL25	70.0 MAX. 3063		95%		
	68.0 * 2995		92%		
	66.0 2928		89%		
MAGPRO	72.0 MAX. 3072		92%		
	70.0 2999		90%		
	68.0 * 2925		87%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load