


Cartridge

7mm Rem Mag - 168 grain

Version 9.0

NOSLER®

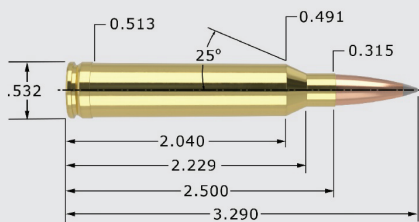

7mm Rem Mag - 168 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.290"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	168gr. Spitzer	3.250"	0.616	0.298
Custom Competition®	CC	168gr. HPBT	3.250"	0.520	0.298
CASE TYPE:	Nosler		PRIMER TYPE	Fed 215	
CASE HOLDS:	75.0	Gr. WATER	BARREL Length/Make	24" Pac-Nor	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4350	62.0 * MAX.	2913	88%		
	60.0	2862	86%		
	58.0	2811	83%		
H4831SC	65.0 * MAX.	2920	90%		
	63.0	2862	88%		
	61.0	2804	85%		
RL22	64.0 * MAX.	2928	93%		
	62.0	2825	90%		
	60.0	2722	87%		
Norma MRP	66.0 * MAX.	2931	97%		
	64.0	2880	94%		
	62.0	2830	91%		
IMR 4831 Most Accurate Powder Tested	64.0 MAX.	2946	91%		
	62.0 *	2898	88%		
	60.0	2851	86%		
H1000	70.0 MAX.	2993	99%		
	68.0 *	2914	96%		
	66.0	2835	93%		
Magnum	72.0 MAX.	2998	97%		
	70.0	2926	95%		
	68.0 *	2855	92%		
RL25	70.0 MAX.	3007	**	101%	
	68.0 *	2914	99%		
	66.0	2821	96%		
MAGPRO	71.0 MAX.	3012	98%		
	69.0	2937	95%		
	67.0 *	2863	92%		
Retumbo	73.0 MAX.	3047	**	105%	
	71.0 *	2975	**	102%	
	69.0	2903	99%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load