


Cartridge

7mm Rem Mag - 175 grain

Version 9.0

NOSLER®

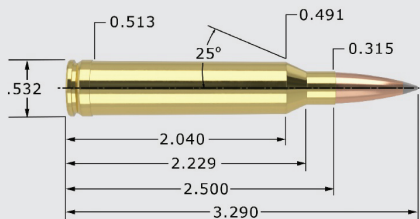

7mm Rem Mag - 175 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.290"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	175gr. Spitzer	3.290"	0.648	0.310
Partition®	PT	175gr. Spitzer	3.290"	0.519	0.310
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215		
CASE HOLDS:	77.0 Gr. WATER	BARREL Length/Make	24" Wiseman		
		BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4320	51.0 MAX.	2720	72%		
	49.0	2620	69%		
	47.0 *	2520	66%		
RL19	58.5 MAX.	2820	83%		
	56.5	2720	80%		
	54.5 *	2619	77%		
H1000	65.5 MAX.	2850	90%		
	63.5	2800	87%		
	61.5 *	2750	85%		
IMR 4350	58.0 * MAX.	2860	81%		
	56.0	2760	78%		
	54.0	2660	75%		
IMR 4831	60.0 MAX.	2870	83%		
	58.0	2780	81%		
	56.0 *	2690	78%		
IMR 7828	63.5 MAX.	2873	88%		
	61.5	2802	85%		
	59.5 *	2731	82%		
N560	60.0 * MAX.	2883	87%		
	58.0	2806	84%		
	56.0	2730	81%		
MAGPRO	70.0 MAX.	2900	94%		
	68.0	2818	91%		
	66.0 *	2735	88%		
RL22	62.5 * MAX.	2970	88%		
Most Accurate	60.5	2890	85%		
Powder Tested	58.5	2810	83%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load