


# Cartridge

## 7mm Rem SA Ultra Mag - 140 grain

Version 9.0

# NOSLER®

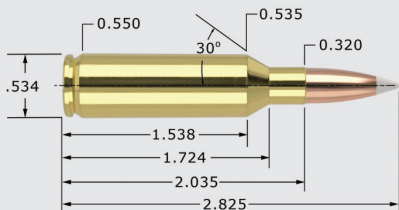

## 7mm Rem SA Ultra Mag - 140 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	140gr. Spitzer	2.800"	0.485	0.248
Ballistic Tip®	<b>BT</b>	140gr. Spitzer	2.800"	0.485	0.248
CT® Ballistic Silvertip®	<b>BST</b>	140gr. Spitzer	2.800"	0.485	0.248
Expansion Tip®	<b>ET</b>	140gr. Spitzer	2.770"	0.489	0.248
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	140gr. Spitzer	2.800"	0.434	0.248

CASE TYPE:	Nosler		PRIMER TYPE	Rem 9 1/2M	
CASE HOLDS:	67.1	Gr. WATER	BARREL Length/Make	24" Wiseman	
			BARREL Twist	1-9 1/2"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>H414</b>	60.5	MAX. 3131	94%		
	58.5	3035	91%		
	56.5 *	2940	88%		
<b>IMR 4350</b>	60.0 * MAX.	3143	96%		
Most Accurate	58.0	3041	92%		
Powder Tested	56.0	2940	89%		
<b>RL19</b>	62.0	MAX. 3147	100%		
	60.0	3048	97%		
	58.0 *	2949	94%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load