


Cartridge

7mm Rem SA Ultra Mag - 150 grain

Version 9.0

NOSLER®

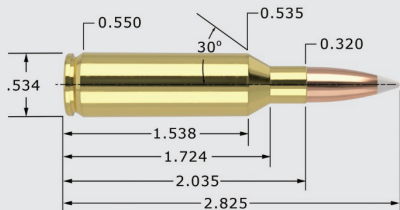

7mm Rem SA Ultra Mag - 150 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	2.800"	0.493	0.266
AccuBond® Long Range	ABLR	150gr. Spitzer	2.800"	0.546	0.266
Ballistic Tip®	BT	150gr. Spitzer	2.800"	0.493	0.266
CT® Ballistic Silvertip®	BST	150gr. Spitzer	2.800"	0.493	0.266
Expansion Tip®	ET	150gr. Spitzer	2.770"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	2.800"	0.456	0.266

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	65.8 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9 1/2"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350	58.5 * MAX. 3036	<div style="width: 95%;"></div>	95%
	56.5 2905	<div style="width: 85%;"></div>	92%
	54.5 2775	<div style="width: 10%;"></div>	89%
H4831SC	62.5 MAX. 3038	<div style="width: 99%;"></div>	99%
	Most Accurate 60.5 * 2944	<div style="width: 96%;"></div>	96%
	Powder Tested 58.5 2849	<div style="width: 93%;"></div>	93%
RL19	60.5 * MAX. 3043	<div style="width: 100%;"></div>	100%
	58.5 2927	<div style="width: 97%;"></div>	97%
	56.5 2811	<div style="width: 93%;"></div>	93%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load